

Description:

RX-DM35 I-10V dimmer, easy to install, provides 10V 40mA drive current, suitable for most 0/1-10V power dimming, including MingWei three-in-one dimming power supply, No extra power required.




1. Input voltage: DC0-10V
2. Output current: 40mA
3. compatible all 0/1-10V interface dimmable electronic LED driver and power dimmers
4. Working humidity: 20%-90% RH(Can be customized waterproof IP65)
5. Dimension: 45*21*16mm
6. life span 50000hours
7. CE RoHS FCC

Model	Dimension LxWxH	Input	output	Compatible power supply	Comment
RX-DM35	45x21x16mm	10V Dimming power supply dimming input wire	0.6 ~10V max40mA	0/1~10Vdc LED drivers	Not waterproof
RX-DM35-IP65			0.6~10V max40mA	0/1~10Vdc LED drivers	Waterproof IP65 needs customization


Operating temperature: -30°C ~ 40°C , Lifespan: 50,000 hours (Note: Ta 25°C)

The above data is for reference only!

Dimension:

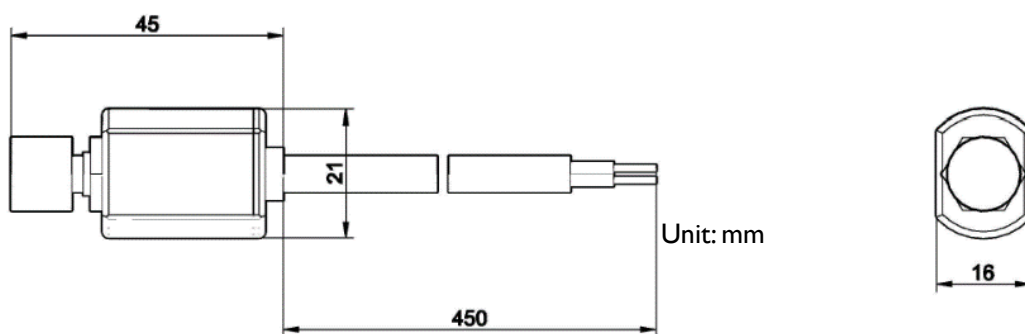

Wiring Diagram

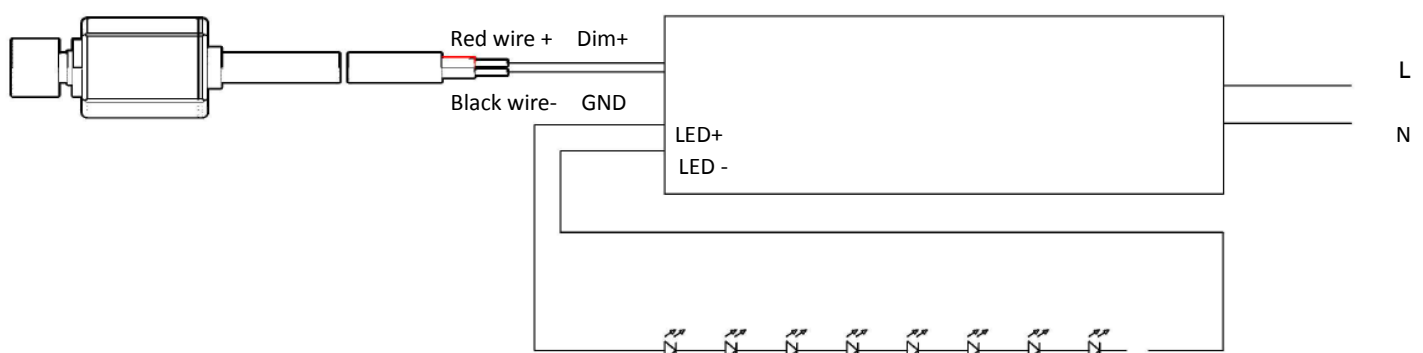

Note:

The installation must be carried out by electrical specialist in accordance with international and national standards.

The max. load connected to the drive is 10V/40mA

Place the driver away from direct heat sources and in well-ventilated spaces. If the driver is built-in, sufficient ventilation must be ensured.

When connecting the electronic LED driver & ballasts and power dimmer, careful attention should be paid to connecting red "+" and black "-"